


Type	Capacity per hour		Voltage (V)	Power (kW)	Fuse (A)	Plug (poles)	Phase	Noise (dB)	PVC connection (mm)	No. of skids	Dimensions			Weight (kg)
	PPM (m <sup>3</sup> )	PPB (m <sup>3</sup> )									A Width (mm)	B Depth (mm)	C Height (mm)	
ES 10	2	1	230	0,6	16	3	1	75	¼"	1	750	625	2000	250
ES 100	124	72	400	2,5	16	5	3	75	110	2	2050	1020	1800	480
ES 200	180	108	400	3,0	16	5	3	75	110	2	2130	1010	1800	780
ES 300	320	192	400	3,5	16	5	3	75	110	2	2320	1050	1800	980
ES 400	400	240	400	3,5	16	5	3	75	110	2	2425	1100	1800	1185
ES 700	720	432	400	5,4	T25	5	3	78	125	2	2850	1250	1800	1800
ES 1000	1000	600	400	7,0	T25	5	3	78	125	2	3050	1450	1800	2300
ES 1200	1280	768	400	7,0	T25	5	3	78	125	2	3250	1550	1800	2800
ES 2000*	2000	1200	400	15,5	32	5	3	80	160	3	5150	1450	1800	4400
ES 2400*	2400	1440	400	15,5	32	5	3	80	160	3	5550	1550	1800	5320

Rev. 19-01 - Mentioned dimensions, weights and other specifications are approximate. No rights can be derived from this document.

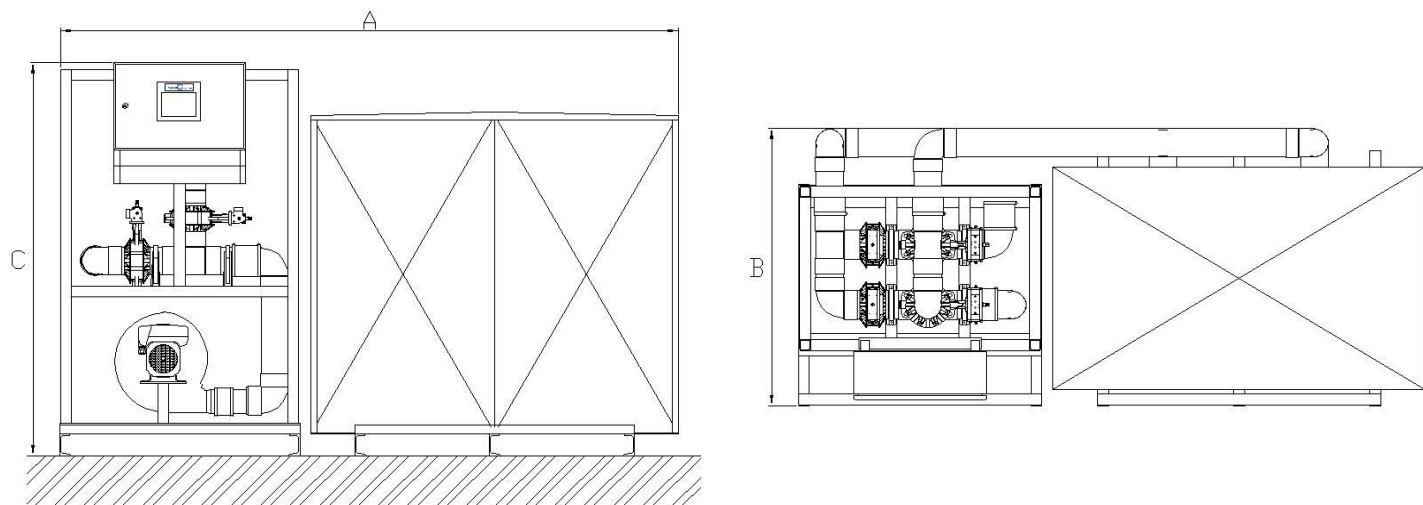

\* Please note that type ES 2000 & ES 2400 have an additional container on the left of the main control unit.