


# CO<sub>2</sub> ADSORBER/SCRUBBER - SPECIFICATIONS

V 24-01

Model	Capacity CO <sub>2</sub> /24h (kg)	Voltage (V)	Power		Fuse (A)	Plug (poles)	Phase	Noise (dB)	PVC Connection (mm)	Adsorber lung (m <sup>3</sup> )	No. of Skids	Dimensions (mm)			Weight (kg)
			connection (kW)	consumption (kW)								A Width	B Depth	C Height	
<b>US 20</b>	10	230	0,39	0,39	16	2	1	75	¼	-	1	550	700	1820	200
<b>US 175</b>	85	230	0,5 - 1,1	0,5	16	2	1	75	110	4	2	1700	1325	1800	470
<b>US 255</b>	125	230	0,5 - 1,1	0,8	16	2	1	75	110	4	2	1700	1325	1825	520
<b>US 405</b>	200	230	0,5 - 1,1	1,1	16	2	1	75	110	6	2	1700	1300	2060	670
<b>US 605</b>	300	400	1,6 - 3,0	1,6	16	5	3	78	110	8	2	2050	1350	2010	970
<b>US 805</b>	400	400	1,6 - 3,0	2,6	16	5	3	78	125	8	2	2150	1400	2050	1120
<b>US 1105</b>	550	400	1,6 - 3,0	3,0	16	5	3	78	125	10	2	2250	1400	2450	1320
<b>US 1405</b>	700	400	1,6 - 3,0	3,0	16	5	3	78	125	12	2	2450	1600	2350	1830
<b>US 2005</b>	1000	400	4,0 - 7,5	5,5	32	5	3	80	160	12	2	2950	1750	2380	2200
<b>US 2205</b>	1100	400	4,0 - 7,5	6,5	32	5	3	80	160	2 x 10	3	3750	1750	2450	2400
<b>US 2805</b>	1400	400	4,0 - 7,5	7,5	32	5	3	80	160	2 x 12	3	4150	1750	2350	3420
<b>US 4005</b>	2000	400	11,0 - 15,0	12	32	5	3	80	160	2 x 12	3	4400	1750	2410	4050


# CO<sub>2</sub> ADSORBER/SCRUBBER - SPECIFICATIONS

V 24-01

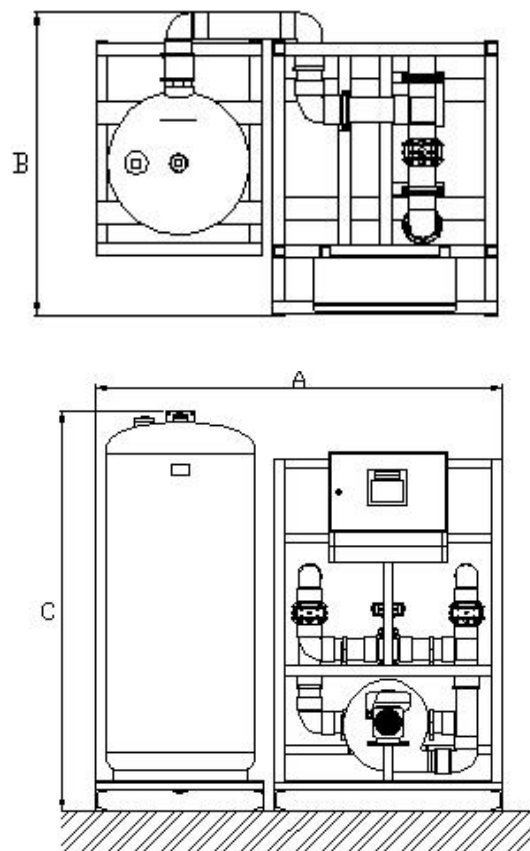


### Models:

- US 175
- US 255
- US 405

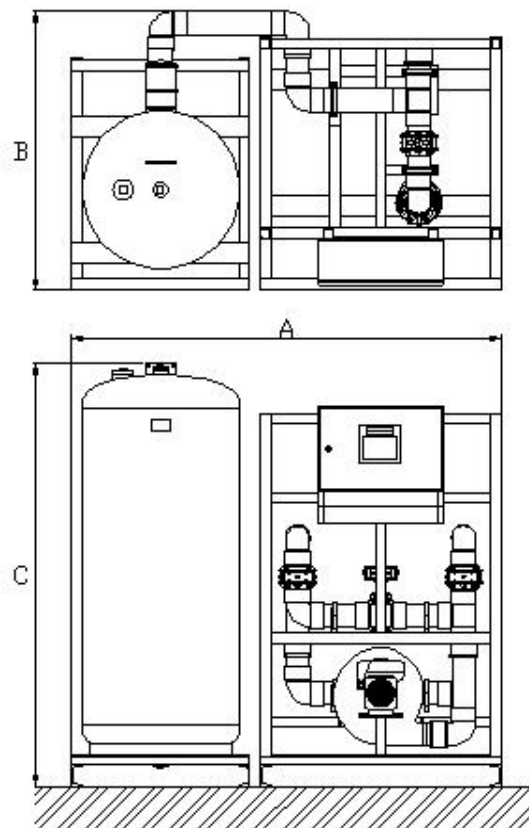

### Models:

- US 605
- US 805
- US 1105
- US 1405
- US 2005

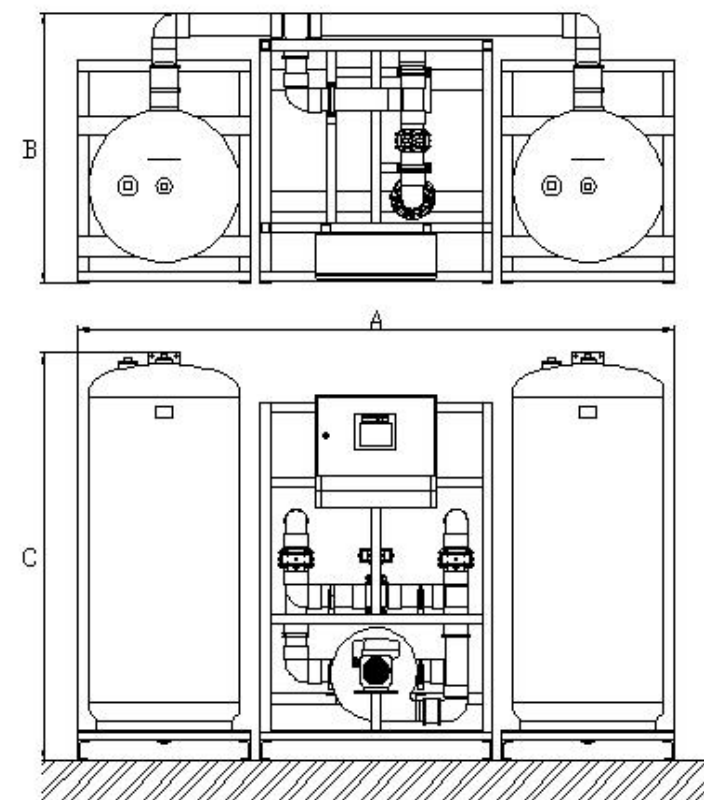

### Models:

- US 2205
- US 2805
- US 4005



---

THE ART OF STORAGE

Oosterblokker 17-A  
1696 BA Oosterblokker  
The Netherlands

+31 229 212 154

sales@besseling-group.com

www.besseling-group.com

