
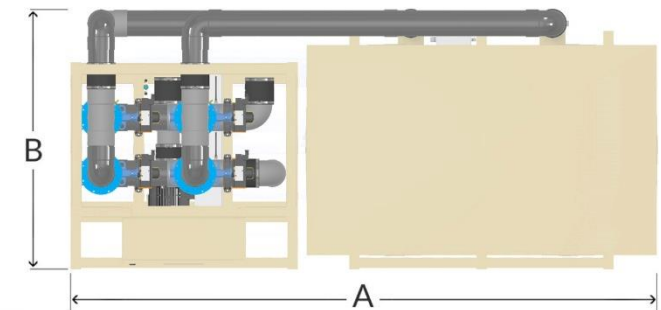


ETHYLENE CONVERTER - SPECIFICATIONS

V 24-01

Model	Capacity per hour		Blower (kW)	Fuse (A)	Plug (poles)	Noise (dB)	PVC connection (mm)	No. of Skids	Dimensions (mm)			Weight (KG)
	m ³ (ppm)	m ³ (ppb)							Width A	Depth B	Height C	
ES 10	2	1	0.5	16	3	75	¼"	1	750	625	2000	250
ES 100	124	72	2.5	16	5	75	110	2	2050	1020	1800	480
ES 200	180	108	3	16	5	75	110	2	2130	1010	1800	780
ES 300	320	192	3.5	16	5	75	110	2	2320	1050	1800	980
ES 400	400	240	3.5	16	5	75	110	2	2425	1100	1800	1185
ES 700	720	432	5.4	T25	5	78	125	2	2850	1250	1800	1800
ES 1000	1000	600	7	T25	5	78	125	2	3050	1450	1800	2300
ES 1200	1280	768	7	T25	5	78	125	2	3250	1550	1800	2800
ES 2000*	2000	1200	15.5	32	5	80	160	3	5150	1450	1800	4400
ES 2400*	2400	1440	15.5	32	5	80	160	3	5550	1550	1800	5320

Blower voltage: 400 V (3 phase) - *exception ES 10: 230 V (1 phase)*

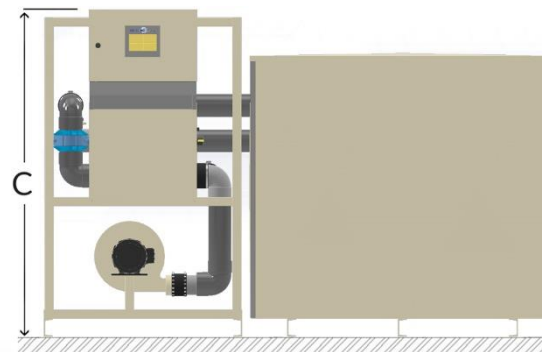

* Model ES 2000 & 2400 have an additional container on the left of the main control unit.



THE ART OF STORAGE

Oosterblokker 17-A
1696 BA Oosterblokker
The Netherlands

+31 229 21 21 54

sales@besseling-group.com

www.besseling-group.com

